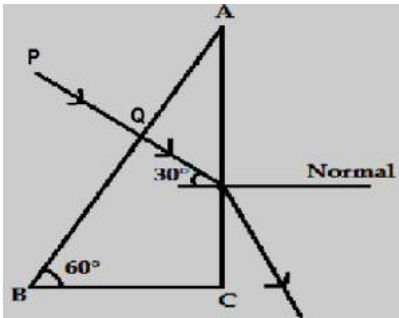




**55/1/C**

Q. No.	Expected Answer / Value Points	Marks	Total Marks
	<b>SECTION-A</b>		
SET1,Q1 SET2,Q4 SET3,Q5	No work is done / $W = qV_{AB} = q \times 0 = 0$	1	1
SET1,Q2 SET2,Q1 SET3,Q3	A diamagnetic specimen would move towards the weaker region of the field while a paramagnetic specimen would move towards the stronger region./ A diamagnetic specimen is repelled by a magnet while a paramagnetic specimen moves towards the magnet./ The paramagnetic get aligned along B and the diagrammatic perpendicular to the field.	1	1
SET1,Q3 SET2,Q5 SET3,Q2	Transmitter, Medium or Channel and Receiver.	1	1
SET1,Q4 SET2,Q3 SET3,Q1 .	It is due to least scattering of red light as it has the longest wavelength/ As per Rayleigh's scattering, the amount of light scattered $\propto \frac{1}{\lambda^4}$	1	1
SET1,Q5 SET2,Q2 SET3,Q4	$E = 2V$ $r = 2\Omega$	$\frac{1}{2}$ $\frac{1}{2}$	1
	<b>SECTION B</b>		
SET1,Q6 SET2,Q9 SET3,Q8.	<div style="border: 1px solid black; padding: 5px; display: inline-block;">           Definition- 1            Reason- <math>\frac{1}{2}</math>            Role of bandpass filter- <math>\frac{1}{2}</math> </div> <p>Modulation index is the ratio of the amplitude of modulating signal to that of carrier wave</p> <p>Alternatively <math>\mu = \frac{A_m}{A_c}</math></p> <p>Reason- <math>\frac{1}{2}</math> To avoid distortion.</p> <p>Role- <math>\frac{1}{2}</math> A bandpass filter rejects low and high frequencies and allows a band of frequencies to pass through.</p>	1    $\frac{1}{2}$  $\frac{1}{2}$	2

SET1,Q7 SET2,Q10 SET3,Q6	<div> <div>Path of emergent ray</div> <div>1</div> <div>Naming the face</div> <div><math>\frac{1}{2}</math></div> <div>Justification</div> <div><math>\frac{1}{2}</math></div> </div>  Face-AC  Here $i_c = \sin^{-1}\left(\frac{2}{3}\right)$ $= \sin^{-1}(0.6)$ $\angle i$ on face AC is $30^\circ$ which is less than $\angle i_c$ . Hence the ray get replaced here.	1	
SET1,Q8 SET2,Q6 SET3,Q7	<div> <div>Formulae of Kinetic energy and deBrogliea wavelength</div> <div><math>\frac{1}{2} + \frac{1}{2}</math></div> <div>Calculation and Result</div> <div><math>\frac{1}{2} + \frac{1}{2}</math></div> </div> Kinetic Energy for the second state- $E_k = \frac{13.6eV}{n^2} = \frac{13.6eV}{4} = 3.4 \times 1.6 \times 10^{-19} J$ De Broglies wavelength $\lambda = \frac{h}{\sqrt{2mE_k}}$ $= \frac{6.63 \times 10^{-34}}{\sqrt{2 \times 9.1 \times 10^{-31} \times 3.4 \times 1.6 \times 10^{-19}}}$ $= 0.067 nm$	$\frac{1}{2}$	$\frac{1}{2}$
SET1,Q9 SET2,Q8 SET3,Q10	<div> <div>Definition</div> <div>1</div> <div>Formula</div> <div><math>\frac{1}{2}</math></div> <div>Calculation and Result</div> <div><math>\frac{1}{2}</math></div> </div> The minimum energy, required to free the electron from the ground state of the hydrogen atom, is known as Ionization Energy.	1	

	$E_o = \frac{me^4}{8\epsilon_o^2 h^2} \text{ i.e., } E_o \propto m$ <p>Therefore, Ionization Energy will become 200 times</p> <p style="text-align: center;">OR</p> <table border="1"><tr><td>Formula</td><td>1</td></tr><tr><td>Calculation and Result</td><td><math>\frac{1}{2} + \frac{1}{2}</math></td></tr></table> $\frac{1}{\lambda} = R \left( \frac{1}{2^2} - \frac{1}{\infty^2} \right)$ <p>For shortest wavelength, <math>n = \alpha</math></p> <p>Therefore, <math>\frac{1}{\lambda} = \frac{R}{4} \Rightarrow \lambda = \frac{4}{R} = 4 \times 10^{-7} \text{ m}</math></p>	Formula	1	Calculation and Result	$\frac{1}{2} + \frac{1}{2}$	$\frac{1}{2}$ $\frac{1}{2}$  1  $\frac{1}{2}$ $\frac{1}{2}$	       2				
Formula	1										
Calculation and Result	$\frac{1}{2} + \frac{1}{2}$										
SET1,Q10 SET2,Q7 SET3,Q9	<table border="1"><tr><td>a) Relation for terminal potential</td><td><math>\frac{1}{2}</math></td></tr><tr><td>b) Justification</td><td><math>\frac{1}{2}</math></td></tr><tr><td>c) Explanation (parallel and series)</td><td><math>\frac{1}{2} + \frac{1}{2}</math></td></tr></table> <p>a) Effective resistance of the circuit <math>R_E = 6\Omega</math></p> $\therefore I = \frac{12A}{6} = 2A$ <p>Terminal potential difference across the cell, <math>V = E - ir</math></p> <p>Also p.d. across <math>4\Omega</math> resistor <math>= 4 \times 2V = 8V</math></p> <p>Hence the voltmeter gives the same reading in the two cases.</p> <p>b) In series -current same In parallel – potential same</p>	a) Relation for terminal potential	$\frac{1}{2}$	b) Justification	$\frac{1}{2}$	c) Explanation (parallel and series)	$\frac{1}{2} + \frac{1}{2}$	$\frac{1}{2}$  $\frac{1}{2}$  $\frac{1}{2}$ $\frac{1}{2}$	       2		
a) Relation for terminal potential	$\frac{1}{2}$										
b) Justification	$\frac{1}{2}$										
c) Explanation (parallel and series)	$\frac{1}{2} + \frac{1}{2}$										
SECTION C											
SET1,Q11 SET2,Q15 SET3,Q22	<table border="1"><tr><td>Definition-</td><td><math>\frac{1}{2}</math></td></tr><tr><td>i. Diagram of Equipotential Surface</td><td><math>\frac{1}{2}</math></td></tr><tr><td>ii. Diagram and reason</td><td><math>\frac{1}{2} + \frac{1}{2}</math></td></tr><tr><td>iii. Answer and Reason</td><td><math>\frac{1}{2} + \frac{1}{2}</math></td></tr></table> <p>Surface with a constant value of potential at all points on the surface.</p>	Definition-	$\frac{1}{2}$	i. Diagram of Equipotential Surface	$\frac{1}{2}$	ii. Diagram and reason	$\frac{1}{2} + \frac{1}{2}$	iii. Answer and Reason	$\frac{1}{2} + \frac{1}{2}$	$\frac{1}{2}$	
Definition-	$\frac{1}{2}$										
i. Diagram of Equipotential Surface	$\frac{1}{2}$										
ii. Diagram and reason	$\frac{1}{2} + \frac{1}{2}$										
iii. Answer and Reason	$\frac{1}{2} + \frac{1}{2}$										

i.

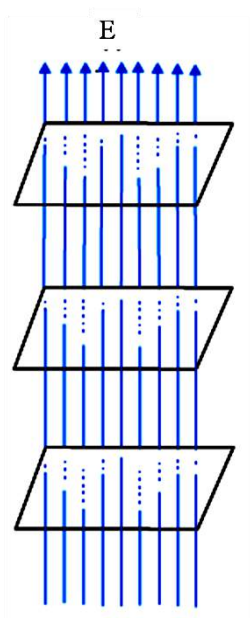 $\frac{1}{2}$  $\frac{1}{2}$ 

ii.

$$V \propto \frac{1}{r}$$

 $\frac{1}{2}$ 

iii.No

 $\frac{1}{2}$ 

If the field lines are tangential, work will be done in moving a charge on the surface which goes against the definition of equipotential surface.

 $\frac{1}{2}$ 

3



SET1,Q12  
SET2,Q14  
SET3,Q12

Statement	1
Plotting the graph	1
Calculating value of ( $\mu$ )refractive index	1


i. When the pass axis of a polaroid makes an angle  $\theta$  with the plane of polarisation of polarised light of intensity  $I_0$  incident on it, then the intensity of the transmitted emergent light is given by  $I = I_0 \cos^2 \theta$



1

**Note:** If the student writes the formula  $I = I_0 \cos^2 \theta$  and draws the

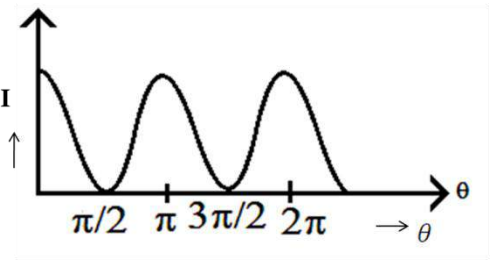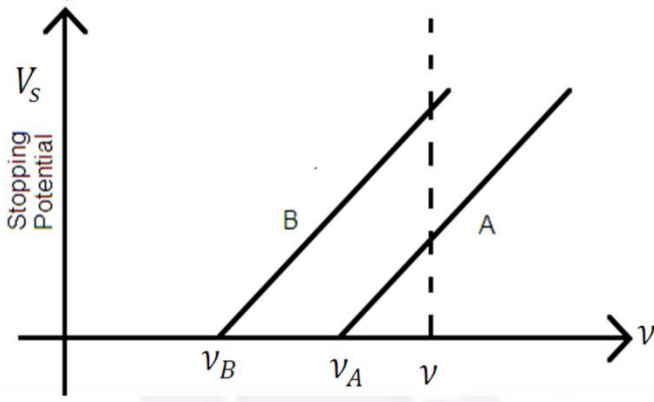	<p>diagram give 1mark.</p> <p>i.</p>  <p>iii. <math>\mu = \tan i_\beta</math>  <math>= \tan 60^\circ = \sqrt{3} = 1.7</math></p>	1	
SET1,Q13 SET2,Q13 SET3,Q14	<div> <div> <p>Sketch of the Graph</p> <p>(i) Stopping Potential and Reason</p> <p>(ii) Dependence of Slope and Explanation</p> </div> <div> <p>1</p> <p><math>\frac{1}{2} + \frac{1}{2}</math></p> <p><math>\frac{1}{2} + \frac{1}{2}</math></p> </div> </div>  <p>(i) For material B          From the graph for the same value of '<math>\nu</math>', stopping potential is more for material 'B'  <math>[V_0 = \frac{h}{e}(\nu - \nu_0)]</math>  <math>\therefore V_0</math> is higher for lower value of <math>\nu_0</math></p> <p>(ii) No          As slope is given by <math>\frac{h}{e}</math> which is constant.</p>	1	
		$\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$	3

SET1,Q14 SET2,Q12 SET3,Q19	<div> <div>(a) Basic nuclear process1</div> <div>(b) (i) value of x, y, z1 (ii) value of a, b, c1</div> </div> <p>a. Basic nuclear reaction</p> $p \rightarrow n + e^+ + \nu$ <p>b.(i) <math>x = \beta^+ / {}_1^0e</math>, y =5, z =11 (ii) a=10, b=2, c=4</p>	1  1 1	3
SET1,Q15 SET2,Q11 SET3,Q21	<div> <div>(i) Relation for drift velocity2</div> <div>(ii) Effect of temperature1</div> </div> <p>i. When a potential difference is applied across a conductor, an electric field is produced and free electrons are acted upon by an electric force (= <math>-Ee</math>). Due to this, electrons accelerate and keep colliding with each other and acquire a constant (average) velocity <math>v_d</math></p> $\therefore, F_e = -Ee$ $\therefore, F_e = \frac{-eV}{l}$ <p>As <math>a = \frac{-F}{m} = \frac{-eV}{m}</math></p> <p>as <math>v = u + at</math></p> <p><math>u = 0</math>, <math>t = \tau</math> (relaxation time)</p> $v_d = -a \tau$ $v_d = \frac{-eV}{lm} \tau$ <p>ii. Decreases, as time of relaxation decreases.</p>	1/2  1/2  1/2  1/2  1/2, 1/2	3
SET1,Q16 SET2,Q22 SET3,Q15	<div> <div>Proof for average power1½</div> <div>Effect on brightness½</div> <div>Explanation1</div> </div>		

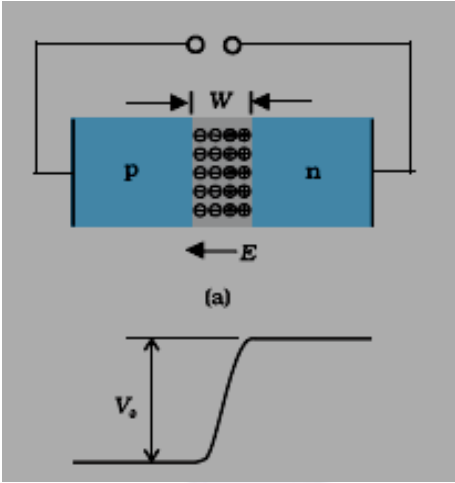	<p>i) <math>P_{av} = I_{av} \times e_{av} \cos \phi</math></p> <p>For an ideal inductor, <math>\phi = \frac{\pi}{2}</math></p> <p><math>\therefore P_{av} = I_{av} \times e_{av} \cos \frac{\pi}{2}</math></p> <p><math>P_{av} = 0</math></p> <p>ii) Brightness decreases</p> <p>Because as iron rod is inserted inductance increases. Thus, current decreases and brightness decreases.</p>	<p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p>	3
<p>SET1,Q17</p> <p>SET2,Q21</p> <p>SET3,Q16</p>	<div> <div> <p>i. Diagram of Formation</p> <p>Explanation of formation of Depletion region</p> <p>Barrier potential</p> <p>ii. Circuit diagram of Half wave rectifier</p> <p>Explanation</p> </div> <div> <p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p> <p>1</p> </div> </div> <div> <p>i.</p>  </div> <p>ii</p>	<p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2} + \frac{1}{2}</math></p>	

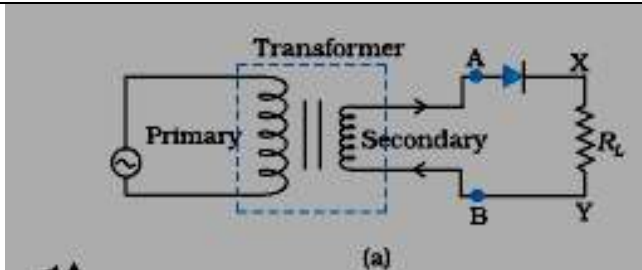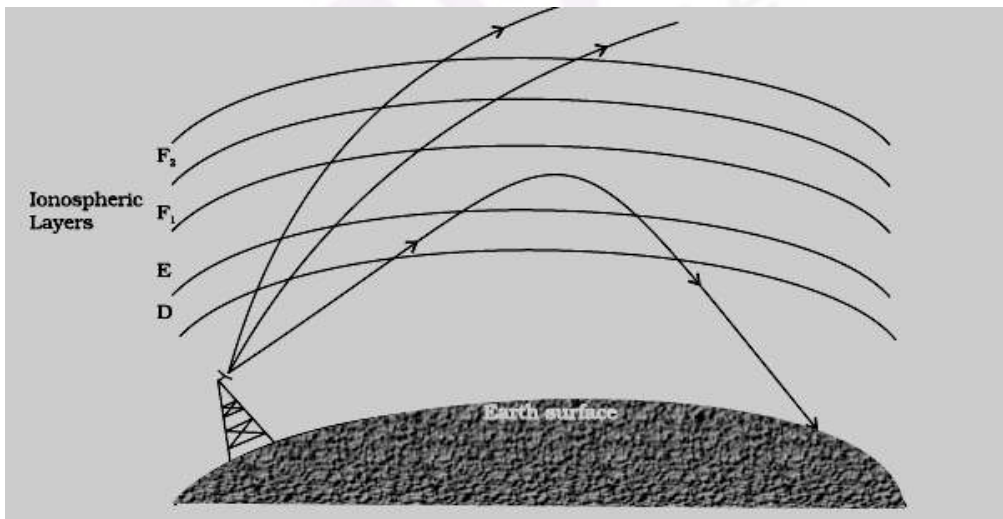	<div></div> <p>Working- If an alternating voltage is applied across a diode in series with a load, a pulsating voltage will appear across the load only during that half cycle of the ac input during which the diode is forward biased.</p> <p>Therefore, in the positive half – cycle of ac input there is a current through the load resistor <math>R_L</math> and we get an output voltage whereas half – cycle. There is no output during the negative half cycle. Thus, the output voltage is restricted to only one direction and is said to be rectified.</p> <p><b>[Note-If the student draws only the input and output wave form, then award <math>\frac{1}{2}</math> marks only]</b></p>	<div><math>\frac{1}{2}</math></div> <div><math>\frac{1}{2}</math></div> <div><math>\frac{1}{2}</math></div> <div>3</div>								
SET1,Q18 SET2,Q20 SET3,Q13	<div><table><tr><td>a) Mode of propagation</td><td><math>\frac{1}{2}</math></td></tr><tr><td>Labeled diagram</td><td>1</td></tr><tr><td>Explanation</td><td><math>\frac{1}{2}</math></td></tr><tr><td>b) Reason</td><td>1</td></tr></table><p>a) Sky wave propagation</p><div></div><p>Long distance communication can be achieved by reflection of radio waves by the ionosphere, back towards the Earth. This ionosphere layer acts as a reflector only for a certain range of frequencies.(fewMHz to 30MHz)</p><p>b) Electromagnetic waves of frequencies higher than 30MHz, penetrate the ionosphere and escape whereas the waves less than 30MHz are</p></div>	a) Mode of propagation	$\frac{1}{2}$	Labeled diagram	1	Explanation	$\frac{1}{2}$	b) Reason	1	<div><math>\frac{1}{2}</math></div> <div>1</div> <div><math>\frac{1}{2}</math></div> <div>1</div> <div>3</div>
a) Mode of propagation	$\frac{1}{2}$									
Labeled diagram	1									
Explanation	$\frac{1}{2}$									
b) Reason	1									



	reflected back to the earth by the ionosphere.		
SET1,Q19 SET2,Q19 SET3,Q17	<div> i. Identification 1+1  ii. Momentary deflection of galvanometer  Reason ½  Expressions ½ </div> i. a. Microwaves 1 b. X-rays 1  ii. Due to conduction current in the connecting wires and a displacement current between the plates ½ $I_d = \epsilon_0 \frac{d\phi_E}{dt}$ ½		3
SET1,Q20 SET2,Q18 SET3,Q11	<div> i. Collection current ½ + ½  ii. Base Current ½ + ½  iii. Base voltage ½ + ½ </div> i. Input signal Voltage AC Collector Current- $i_c = \frac{V_{ce}}{R_c} = 1.0mA$ ½ + ½  Base Current- $i_b = \frac{i_c}{\beta} = \frac{1.0mA}{100} = 0.01mA$ ½ + ½  Base signal Voltage= $i_b R = 0.01mA \times 1k\Omega = 10mV$ ½ + ½		3

SET1,Q21  
SET2,Q17  
SET3,Q18

Definition- wave front	1
Statement- Huygen's Principle	1
Labelled diagram	1

Definition- Locus of all points which oscillate in phase.


1

i. Huygen's Principle- Each point of the wave front is the source of a secondary disturbance and the wavelets emanating from these points spread out in all directions. These travel with the same velocity as that of the original wave front.

$\frac{1}{2}$

ii. The shape and position of the wave front, after time 't', is given by the tangential envelope to the secondary wavelets.

$\frac{1}{2}$

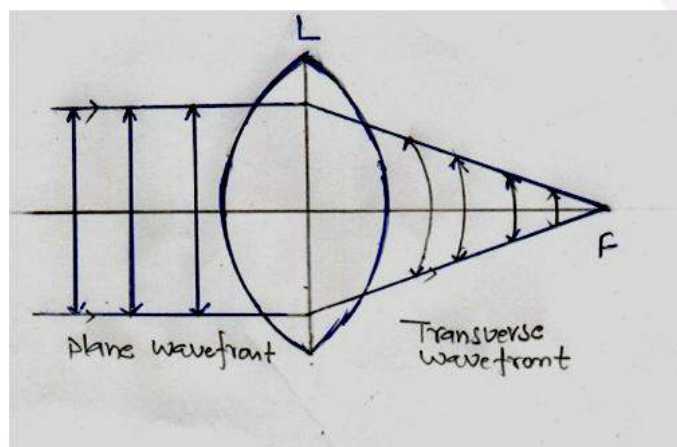

$\frac{1}{2} + \frac{1}{2}$  3


OR


i. Reason for no change in frequency after reflection and the refraction of light-	$\frac{1}{2} + \frac{1}{2}$
ii. Reduction in Energy	1
iii. Factors determining the intensity of light	1

i. Reflection and refraction arise through interaction of incident light with atomic constituents of matter which vibrate with the same frequency as that of the incident light. Hence frequency remains unchanged.

ii. No. [Energy carried by a wave depends on the amplitude of the wave, not on the speed of wave propagation].

iii. For a given frequency, intensity of light in the photon picture is

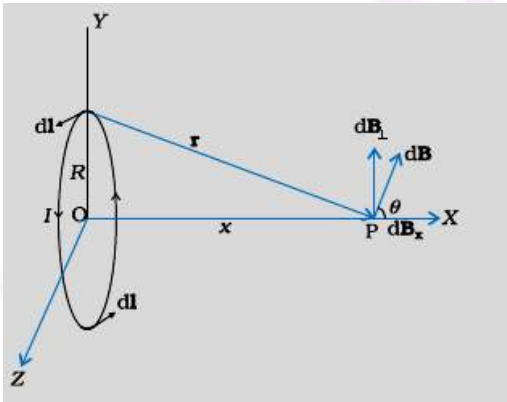	<p>determined by the number of photon incident normally on a crossing an unit area per unit time.</p>	<p><math>\frac{1}{2} + \frac{1}{2}</math></p> <p><math>\frac{1}{2} + \frac{1}{2}</math></p> <p>1</p>	3
<p>SET1,Q22</p> <p>SET2,Q16</p> <p>SET3,Q20</p>	<div> <div>Explanation for magnetic field on the axis of current loop2</div> <div>Drawing- magnetic field lines1</div> </div> <p>i.</p>  $\overrightarrow{dB} = \frac{\mu_0 d\vec{l} \times \vec{r}}{4\pi r^3}$ $dB_x = \frac{\mu_0 I dl R}{4\pi (x^2 + R^2)^{\frac{3}{2}}}$ $\overrightarrow{B} = B_x \hat{i} = \frac{\mu_0 I R^2}{2 (x^2 + R^2)^{\frac{3}{2}}} \hat{i}$ <p>ii.</p>	<p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p>	

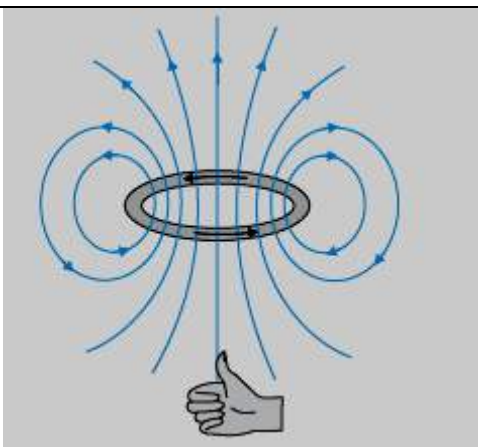

1

3

## SECTION D

SET1,Q23  
SET2,Q23  
SET3,Q23

- a. Principle and working  
b. Two values, each, displayed by  
i. Ram  
ii. School teacher

1+1

$\frac{1}{2} + \frac{1}{2}$

$\frac{1}{2} + \frac{1}{2}$

a. Principle:

Whenever a coil is rotated in a magnetic field, an emf is induced in it due to the change in magnetic flux linked with it.

Working-

As the coil rotates, its inclination ( $\theta$ ) with respect to the field changes.

Hence sinusoidal /varying emf(= $e_0 \sin \omega t$ ) is obtained./May also be explained graphically.

**[Note- Give full marks if the student obtains the expression for induced emf mathematically.]**

b. Values

Ram- Scientific aptitude, curiosity, keenness to learn, positive approach, etc(any two)

Teacher-

Dedication, concern for students, depth of knowledge, generous, positive attitude towards queries, motivational approach.(any two)

1

$\frac{1}{2} + \frac{1}{2}$

$\frac{1}{2} + \frac{1}{2}$

3

**SECTION E**


SET1,Q24  
SET2,Q26  
SET3,Q25

i. Labelled diagram	1
Principle	1
ii. Expression for the turn ratio in terms of voltage	$\frac{1}{2}$
iii. Ratio of primary and secondary currents in terms of turns	1
iv. Current drawn by primary	
Formula-	$\frac{1}{2}$
Calculation and result	$\frac{1}{2} + \frac{1}{2}$

1

i. Labelled diagram

SOFT IRON CORE

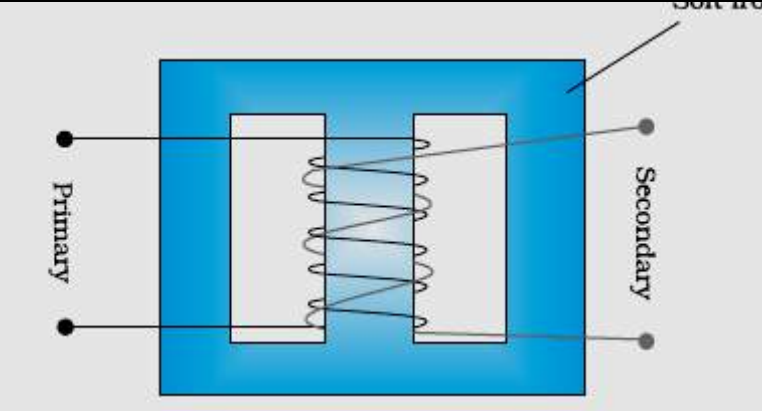	1									
<p>Principle-</p> <p>When the current flowing through the primary coil changes, an emf is induced in the secondary coil due to the change in magnetic flux linked with it.</p>	1 1 1									
<p>[Note- Give ½ mark to the student who writes only mutual induction only.]</p>	½									
<p>ii. <math>\frac{V_s}{V_p} = \frac{N_s}{N_p}</math></p>	½ + ½									
<p>iii. For an ideal transformer,</p> $i_p V_p = i_s V_s \therefore \frac{i_p}{i_s} = \frac{V_s}{V_p} = \frac{N_s}{N_p}$	½									
<p>iv. We have</p> $i_p V_p = i_s V_s = 550 \text{ W}$ $V_p = 220 \text{ V}$ $i_p = \frac{550}{220} = \frac{5}{2} = 2.5 \text{ A}$	½	5								
<p style="text-align: center;"><b>OR</b></p>										
<table><tr><td>a. Meaning of Mutual Inductance</td><td>1</td></tr><tr><td>Expression</td><td>1½</td></tr><tr><td>b. Proof</td><td>2</td></tr><tr><td>Diagram</td><td>½</td></tr></table>	a. Meaning of Mutual Inductance	1	Expression	1½	b. Proof	2	Diagram	½	1	
a. Meaning of Mutual Inductance	1									
Expression	1½									
b. Proof	2									
Diagram	½									
	½									
<p>a. Mutual Inductance is the property of a pair of coils due to which an emf induced in one of the coils due to the change in the current in the other coil.</p>	½									

$$\text{Mathematically } e_2 = - \frac{M di_1}{dt}$$

$$\therefore M = - \frac{e_2}{di_1/dt}$$


Let a current  $I_2$  flow through the outer circular coil. Then

$$B_2 = \mu I_2 / 2r_2$$

$$\therefore \Phi_1 = \pi r_1^2 B_2 = \frac{\mu \pi r_1^2}{2r_2} I_2 = M_{12} I_2$$

$$\text{Thus } M_{12} = \frac{\mu \pi r_1^2}{2r_2} = M_{21}$$

b.

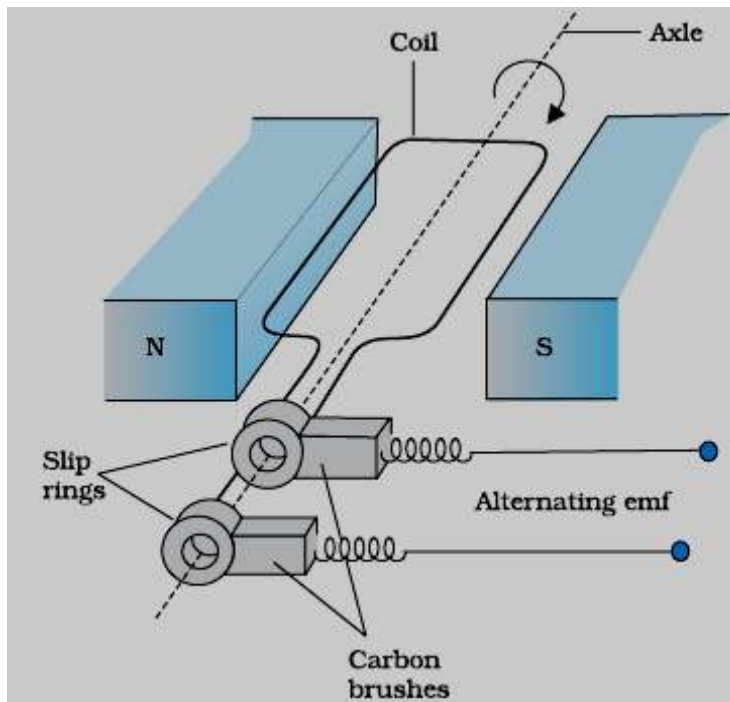

Flux at any time 't'.

$$\Phi_B = BA \cos \theta = BA \cos \omega t$$

From Faraday's Law, induced emf

$$e = -N \frac{d\Phi_B}{dt} = NBA \frac{d}{dt} (\cos \omega t)$$

Thus the instantaneous value of emf is

$$E = NBA \omega \sin \omega t$$

For maximum value of emf  $\sin \omega t = \pm 1$

$$\text{i.e., } e_0 = NBA \omega = 2\pi f NBA$$

1/2

1/2

1/2


1/2

1/2

5

SET1,Q25  
SET2,Q24  
SET3,Q26  
Q25.

- |                                                                                               |    |
|-----------------------------------------------------------------------------------------------|----|
| i. Derivation of $\frac{n_2}{v} - \frac{n_1}{u} = \frac{(n_2 - n_1)}{R}$                      | 1½ |
| $\frac{1}{f} = \left(\frac{n_2 - n_1}{n_1}\right) \left(\frac{1}{R_1} - \frac{1}{R_2}\right)$ | 1½ |
| ii. Formula                                                                                   | ½  |
| Calculation and result                                                                        | 1½ |

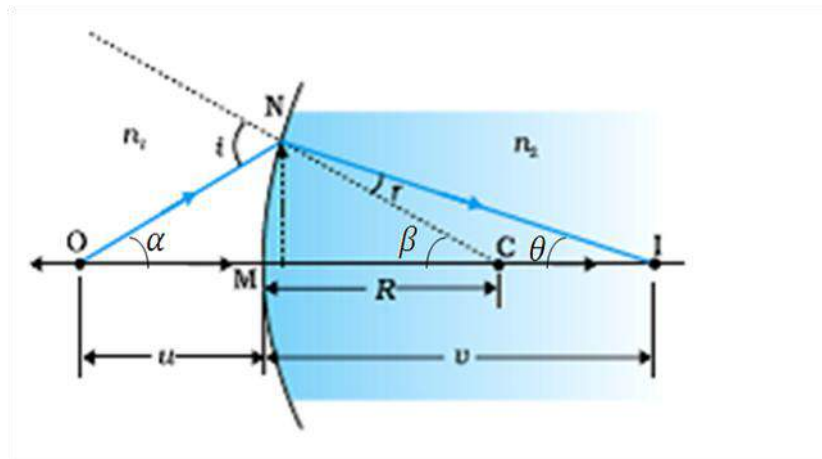

Ray diagram showing real image formation as per prescription

$$\theta_1 = \alpha + \beta$$

$$\theta_2 = \beta - \gamma \quad \therefore \gamma = \beta - \theta$$

For paraxial rays  $\theta_1$  and  $\theta_2$  are small

Therefore,  $n_2 \sin \theta_2 = n_1 \sin \theta_1$  (Snells law)

Reduces to

$$\text{At N } \frac{\sin i}{\sin r} \sim \frac{i}{r} = \frac{n_2}{n_1}$$

$$\therefore n_1 = r \times n_2$$

$$(\alpha + \beta)n_1 = (\beta - \theta)n_2$$

$$n_1 \left( \frac{NM}{OM} + \frac{NM}{MC} \right) = \left( \frac{NM}{MC} - \frac{NM}{MI} \right) n_2$$

$$n_1 \left( \frac{1}{-u} + \frac{1}{+R} \right) = \left( \frac{1}{+R} - \frac{1}{u} \right) n_2$$

$$\frac{n_2}{v} - \frac{n_1}{u} = \frac{(n_2 - n_1)}{R_1}$$

Applying above relations to refraction through a lens


½

½

½

1



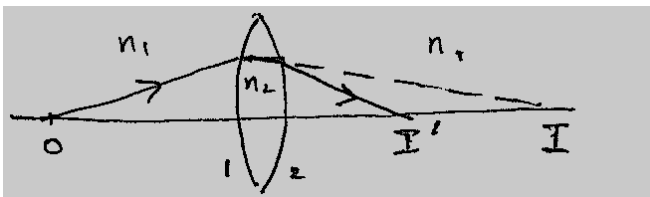

For surface 1

$$\frac{n_2 - n_1}{R_1} = \frac{n_2}{v'} - \frac{n_1}{u} \quad \dots(i)$$

For surface 2

$$\frac{n_1 - n_2}{R_2} = \frac{n_1}{v} - \frac{n_2}{v'} \quad \dots(ii)$$

Adding eqn. (i) and (ii)

$$(n_2 - n_1) \left( \frac{1}{R_1} - \frac{1}{R_2} \right) = n_1 \left( \frac{1}{v} - \frac{1}{u} \right)$$

For  $u = \infty$   $v = f$

$$\therefore \frac{n_1}{f} = (n_2 - n_1) \left( \frac{1}{R_1} - \frac{1}{R_2} \right)$$

$$\Rightarrow \frac{1}{f} = \left( \frac{n_2}{n_1} - 1 \right) \left( \frac{1}{R_1} - \frac{1}{R_2} \right)$$

(iii)  $R = 20 \text{ cm}$   $n_2 = 1.5$   $n_1 = 1$   $u = -100 \text{ cm}$

$$\frac{n_2}{v} = \frac{(n_2 - n_1)}{R} + \frac{n_1}{u}$$

$$= \frac{0.5}{20 \text{ cm}} - \frac{1}{100 \text{ cm}}$$

$$= \frac{1.5}{100} \text{ cm}$$

$\Rightarrow V = 100 \text{ cm}$  a real image on the other side, 100 cm away from the surface.

**OR**

a.	i. Labelled ray diagram of Astronomical Telescope	1½
	Definition of magnifying Prism	1
	ii. Identification of lenses	½+½
	Justification	½+½
	Reason	½

½


½

½

½

½

5

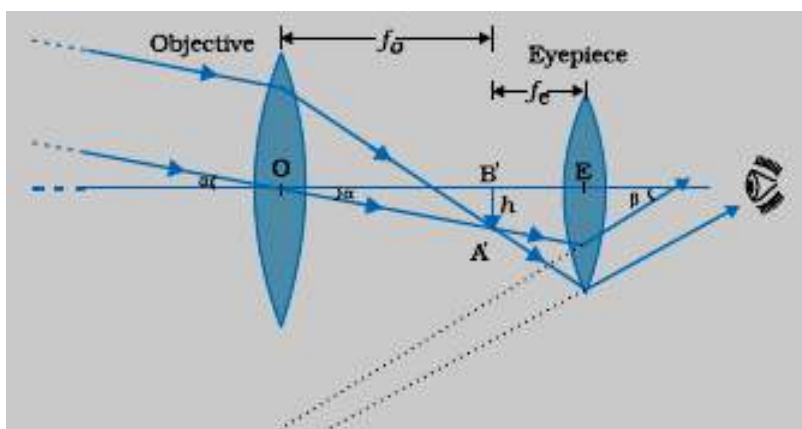

Definition-It is the ratio of the angle subtended at the eye, by the final image, to the angle which the object subtends at the lens, or the eye.

b.

i. Objective = 5D

Eye lens = 10D

This choice would give higher magnification as

$$M = \frac{f_o}{f_e} = \frac{P_e}{P_o}$$

ii. High resolving power/ Brighter image / lower limit of resolution(**any one**)

1½

1

½

½


½ + ½

½

5

SET1,Q26  
SET2,Q25  
SET3,Q24

- |     |                                                     |                             |
|-----|-----------------------------------------------------|-----------------------------|
| i.  | Derivation for electric field due to infinite plane |                             |
|     | Sheet of charge                                     | 2                           |
|     | Directions of field                                 | $\frac{1}{2} + \frac{1}{2}$ |
| ii. | Formula                                             | $\frac{1}{2}$               |
|     | Calculation and result                              | $1\frac{1}{2}$              |

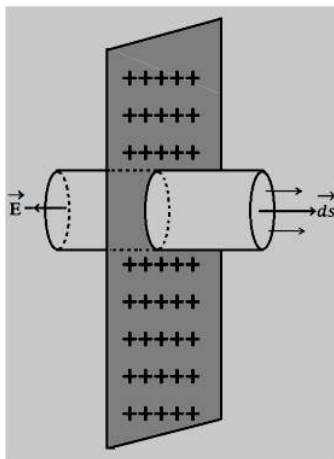

Symmetry of situation suggests that  $\vec{E}$  is perpendicular to the plane  $\Rightarrow$  Gaussian surface through P like a cylinder of flat caps parallel to the plane and one cap passing through P. the plane being the plane of symmetry for the Gaussian surface.

$$\oint \vec{E} \cdot d\vec{s} = \int_{\text{through caps}} \vec{E} \cdot d\vec{s}$$

$\vec{E} \perp d\vec{s}$  for all over curved surface and hence  $\vec{E} \cdot d\vec{s} = 0$

$$\int_{\text{caps}} E ds = 2E\Delta s$$

$\Delta s$  = area of each cap

By Gauss' law

$$\oint \vec{E} \cdot d\vec{s} = \frac{q}{\epsilon_0} = \frac{\sigma \Delta s}{\epsilon_0}$$

$$\therefore 2E\Delta s = \frac{\sigma \Delta s}{\epsilon_0}$$

$$E = \frac{\sigma}{2\epsilon_0}$$

If  $\sigma$  is positive  $\vec{E}$  points normally outwards/away from the sheet

If  $\sigma$  is (-)ve  $\vec{E}$  points normally inwards/towards the sheet

$\frac{1}{2}$

$\frac{1}{2}$

$\frac{1}{2}$

$\frac{1}{2}$

$\frac{1}{2}$

$\frac{1}{2}$

$$U_s = \frac{1}{2} C_s V_s^2$$

$$U_p = \frac{1}{2} C_p V_p^2$$

$$\Rightarrow \frac{V_{series}}{V_{parallel}} = \sqrt{\frac{C_{equivalent\ parallel}}{C_{equivalent\ series}}}$$

$$= \sqrt{\frac{\frac{C_1 + C_2}{C_1 C_2}}{C_1 + C_2}}$$

$$= \frac{C_1 + C_2}{\sqrt{C_1 C_2}} = \frac{3}{\sqrt{2}}$$

OR

i. Deriving the expression for Field between the plate & outside

Direction of electric field inside and outside

Potential difference between the plates

Capacitance

ii. Direction of flow of charge


$\frac{1}{2} + \frac{1}{2}$

$\frac{1}{2} + \frac{1}{2}$

1

1

$\frac{1}{2} + \frac{1}{2}$

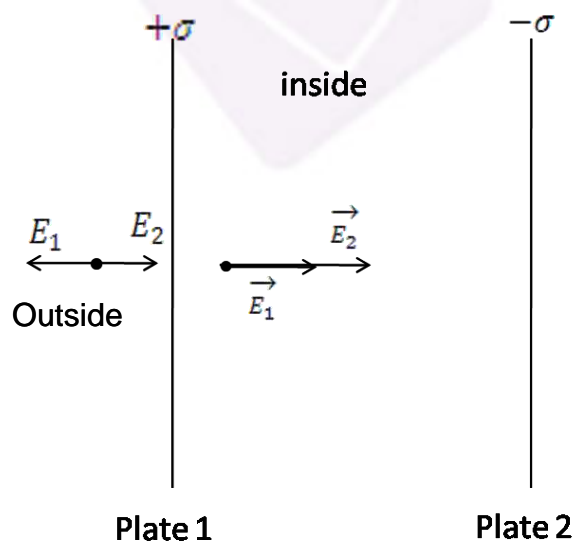

$\frac{1}{2} + \frac{1}{2}$

	<p>Inside</p> <p><math>\rightarrow \rightarrow + \rightarrow</math>  <math>E = E_1 + E_2</math></p> <p><math>= \frac{\sigma + \sigma}{2\epsilon_0} = \frac{\sigma}{\epsilon_0}</math></p> <p>Outside</p> <p><math>\rightarrow \rightarrow \rightarrow</math>  <math>E = E_2 - E_1</math></p> <p><math>= \frac{\sigma - \sigma}{2\epsilon_0} = 0</math></p> <p>b. Potential difference between plates</p> <p><math>V = Ed = \frac{1}{\epsilon_0} \frac{Qd}{A}</math></p> <p>c. Capacitance</p> <p><math>C = \frac{Q}{V} = \frac{\epsilon_0 A}{d}</math></p> <p>ii. As potential on and inside a charged sphere is given</p> <p><math>V = \frac{1}{4\pi\epsilon_0} \frac{q}{r} = \frac{1}{4\pi\epsilon_0} \cdot \frac{4\pi r^2 \sigma}{r}</math></p> <p><math>\therefore, V \propto r</math></p> <p>Hence, the bigger sphere will be at higher potential, so charge will flow from bigger sphere to smaller sphere.</p>	<p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2} + \frac{1}{2}</math></p> <p><math>\frac{1}{2} + \frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p> <p><math>\frac{1}{2}</math></p>	<p>5</p>
--	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------