

Date: 2nd September 2020

Time: 09:00 am - 12:00 pm

Subject: Physics


The mass density of a spherical galaxy K varies as $\frac{K}{r}$ over a large distance 'r' from its **Q.1** centre. In that region, a small star is in a circular orbit of radius R. Then the period of revolution, T depends on R as:

(1)
$$T^2 \propto R$$

(2)
$$T^2 \propto R^3$$

(2)
$$T^2 \propto R^3$$
 (3) $T^2 \propto \frac{1}{R^3}$

Sol. **(1)**



Mass of galaxy = $\int_{0}^{\infty} \rho dv$

$$=\int\limits_{0}^{R}\frac{k}{r}\,4\pi r^{2}dr$$

$$=4\pi k \int_{0}^{R} r dr$$

$$M=\frac{4\pi kR^2}{2}=k_1R^2$$

$$F = m\omega^2 R$$

$$\frac{GMm}{R^2}=m\omega^2R$$

$$\frac{Gk_{1}R^{2}}{R^{2}}=\omega^{2}R$$

$$\therefore \omega^2 = \frac{k_2}{R}$$

$$\omega = \sqrt{\frac{k_2}{R}}$$

$$T=\frac{2\pi}{\omega}=2\pi\sqrt{\frac{R}{k_2}}$$

$$T=k_{_{3}}\sqrt{R}$$

$$T^2 \propto \, R$$



- An amplitude modulated wave is represented by the expression $v_m = 5(1 + 0.6 \cos 6)$ Q.2 sin (211 x 104 t) volts. The minimum and maximum amplitudes of the amplitude modulated wave are, respectively:
 - $(1) \frac{3}{2} V, 5V$
- (2) 5V, 8V (3) 3V, 5V
- (4) $\frac{5}{2}$ V, 8V

Sol. (4)


$$\frac{A_m}{A_c} = 0.6$$

 $V_m = (5+3 \cos 6280t) \sin (211 \times 10^4 t)$ maximum Amp. = 5+3 = 8 V

minimum Amp. = 5-3 = 2 V


from the given option nearest value of minimum Amplitude = $\frac{5}{2}$ V

Q.3 A spherical mirror is obtained as shown in the figure from a hollow glass sphere. If an object is positioned in front of the mirror, what will be the nature and magnification of the image of the object ? (Figure drawn as schematic and not to scale)



- (1) Erect, virtual and unmagnified
- (3) Erect, virtual and magnified
- (2) Inverted, real and magnified
- (4) Inverted, real and unmagnified


Sol. (4)



- ∴ beyond C i.e. $-\infty < u < C$
- ∴ real, inverted and unmagnified




Q.4 A cylindrical vessel containing a liquid is rotated about its axis so that the liquid rises at its sides as shown in the figure. The radius of vessel is 5 cm an and the angular speed of rotation is ω rad s⁻¹. The difference in the height, h (in cm) of liquid at the centre of vessel and at the side will be :



(1) (3) $(2) \ \frac{2\omega^2}{25g}$

 $(3) \ \frac{25\omega^2}{2g}$

Sol.



 $y = \frac{\omega^2 x^2}{2g}$

at x = 5cm, y=h

$$h=\frac{\omega^2(5)^2}{2g}=\frac{25\omega^2}{2g}$$



- Q.5 If speed V, area A and force F are chosen as fundamental units, then the dimension of Young's modulus will be
 - (1) FA^2V^{-3}
- (2) FA^2V^{-2}
- (3) $FA^{-1}V^0$
- (4) FA²V⁻¹

Sol. (3)

$$Y = k [F]^x [A]^y [V]^z$$

$$[ML^{1}T^{-2}] = [MLT^{-2}]^{x} [L^{2}]^{y} [LT^{-1}]^{z}$$

 $[ML^{1}T^{-2}] = [M^{x} L^{x+2y+z}T^{-2x-z}]$


$$[ML^{1}T^{-2}] = [M^{x} L^{x+2y+z}T^{-2x-z}]$$

$$x = 1$$
, $-2x-z = -2$, $x + 2y + z = -1$

$$\Rightarrow$$
 z = 0

$$\Rightarrow$$
 y = -1

A bead of mass m stays at point P (a, b) on a wire bent in the shape of a parabola Q.6 $y = 4Cx^2$ and rotating with angular speed ω (see figure). The value of ω is (neglect friction):



- (1) $\sqrt{\frac{2g}{C}}$
- (2) $2\sqrt{gC}$
- (3) $\sqrt{\frac{2gC}{ab}}$
- (4) $2\sqrt{2gC}$

Sol.

$$y = 4 cx^2$$

$$\frac{dy}{dx} = 8cx$$

 $N \cos \theta = mg$

N sin $\theta = m\omega^2 a$

$$\tan\theta = \frac{m\omega^2 a}{mg}$$


$$\tan\theta = \frac{dy}{dx} = 8cx$$

$$8 cx = \frac{\omega^2 a}{q}$$

$$(x = a), 8 c a = \frac{\omega^2 a}{g}$$

$$\sqrt{8cg} = \omega$$

$$2\sqrt{2gc} = \omega$$





- **Q.7** Magnetic materials used for making permanent magnets (P) and magnets in a transformer (T) have different properties of the following, which property best matches for the type of magnet required ?
 - (1) P: Small retentivity, large coercivity (2) P: Large retentivity, large coercivity
 - (3) T: Large retentivity, large coercivity (4) T: Large retentivity, small coercivity
- Sol. (2)

Permanent magnet must retain for long use and should not be easily demagnetised.

- **Q. 8** Interference fringes are observed on a screen by illuminating two thin slits 1 mm apart with a light source ($\lambda = 632.8$ nm). The distance between the screen and the slits is 100 cm. If a bright fringe is observed on screen at a distance of 1.27 mm from the central bright fringe, then the path difference between the waves, which are reaching this point from the slits is close to :
 - (1) 2.05 μm
- (2) 2.87 nm
- (3) 2 nm
- (4) 1.27 μm

Sol. (4)

given,
$$d = 1mm$$

$$\lambda = 632.8 \text{ nm}$$

$$D = 100cm$$

$$y = 1.27 \text{ mm}$$

$$\Delta x = d \sin \theta$$

$$:: (\theta = small)$$

$$\Delta x = d \tan \theta$$

$$\Delta x = \frac{dy}{D} = \frac{1x10^{-3} \times 1.27 \times 10^{-3}}{100 \times 10^{-2}}$$

$$= 1.27 \times 10^{-6} \,\mathrm{m}$$

$$= 1.27 \mu m$$

- **Q.9** A gas mixture consists of 3 moles of oxygen and 5 moles of argon at temperature T. Assuming the gases to be ideal and the oxygen bond to be rigid, the total internal energy (in units of RT) of the mixture is:
 - (1) 11
- (2) 13
- (3) 15
- (4) 20

Sol. (3)

$$U = n_1 C_{v_1} T + n_2 C_{v_2} T$$

$$=3\times\frac{5}{2}RT+5x\frac{3}{2}RT$$

$$=\frac{30}{2}RT=15RT$$



0. 10 A plane electromagnetic wave, has frequency of 2.0×10^{10} Hz and its energy density is 1.02 \times 10⁻⁸ J/m³ in vacuum. The amplitude of the magnetic field of the wave is close

(
$$\frac{1}{4\pi\epsilon_0}=9\times 10^9\,\frac{Nm^2}{C^2}$$
 and speed of light = $3\times 10^8~ms^{-1}$):

- (1) 160 nT
- (2) 150 nT (3) 180 nT (4) 190 nT

Sol. **(1)**

energy density =
$$\frac{B_0^2}{2\mu_0}$$
 ...(1)

&
$$C = \frac{1}{\sqrt{\mu_0 \in_0}}$$

$$\mu_0=\frac{1}{C^2}\in_0$$

$$B = \sqrt{U \times 2 \mu_0}$$

$$= \sqrt{1.02 \times 10^{-8} \times 2 \times \frac{1}{9 \times 10^{16}} \ 4\pi \times 9 \times 10^{9}}$$

$$= \sqrt{25.62 \times 10^{-15}}$$

$$\cong \sqrt{25600\times 10^{-18}}$$

$$\cong 160\times 10^{-9}$$

= 160nT

Q. 11 Consider four conducting materials copper, tungsten, mercury and aluminium with resistivity ρ_{C} , ρ_{T} , ρ_{m} and ρ_{A} respectively. Then :

(1)
$$\rho_{C} > \rho_{A} > \rho_{T}$$
 (2) $\rho_{A} > \rho_{M} > \rho_{C}$ (3) $\rho_{A} > \rho_{T} > \rho_{C}$ (4) $\rho_{M} > \rho_{A} > \rho_{C}$

$$(2) \rho_{\Delta} > \rho_{M} > \rho_{C}$$

$$(3) \rho_{\Lambda} > \rho_{T} > \rho_{C}$$

$$(4)\rho_{M} > \rho_{\Delta} > \rho_{C}$$

Sol. (4)

(Theoretical concept)

- Q.12 A beam of protons with speed 4 x 10⁵ ms⁻¹ enters a uniform magnetic field of 0.3 T at an angle of 60° to the magnetic field. The pitch of the resulting helical path of protons is close to : (Mass of the pr oton =1.67 \times 10⁻²⁷ kg, charge of the proton =1.69 \times 10⁻¹⁹ C)
 - (1) 4 cm
- (2) 2 cm
- (3) 12 cm
- (4) 5 cm



Sol. (1)

pitch = Vcos 60° × T =
$$\frac{V}{2} \frac{2\pi m}{eB}$$

= $4 \times 10^5 \times \frac{1}{2} \times \frac{2\pi}{0.3} \left(\frac{m}{e}\right)$
= $\frac{4\pi \times 10^5 \times 10^{-8}}{0.3}$
= $\frac{4 \times 3.14 \times 10^{-3}}{3 \times 10^{-1}}$
~ 4×10^{-2} m

Q.13 Two identical strings X and Z made of same material have tension T_y and T_y in them. If their fundamental frequencies are 450 Hz and 300 Hz, respectively, then the ratio T_x/T_z is :

(1) 2.25

≈ 4cm

Sol. (1)

$$f = \frac{1}{2L} \sqrt{\frac{T}{\mu}}$$


given, $\mu_x = \mu_z \& L_x = L_z$ as identical

∴ f
$$\propto \sqrt{T}$$

$$\Rightarrow \frac{\mathsf{T}_{\mathsf{x}}}{\mathsf{T}_{\mathsf{z}}} = \frac{f_{\mathsf{x}}^2}{f_{\mathsf{z}}^2} = \left(\frac{450}{300}\right)^2 = \left(\frac{3}{2}\right)^2 = \frac{9}{4}$$

$$\frac{T_x}{T_y} = 2.25$$

Q.14 A uniform cylinder of mass M and radius R is to be pulled over a step of height a (a < R) by applying a force F at its centre 'O' perpendicular to the plane through the axes of the cylinder on the edge of the step (see figure). The minimum value of F required is



$$(1) \text{Mg} \sqrt{\left(\frac{R}{R-a}\right)^2 - 1}$$
 $(2) \text{Mg} \sqrt{1 - \frac{a^2}{R^2}}$ $(3) \text{Mg} \frac{a}{R}$ $(4) \text{Mg} \sqrt{1 - \left(\frac{R-a}{R}\right)^2}$


(2) Mg
$$\sqrt{1-\frac{a^2}{R^2}}$$

(3) Mg
$$\frac{a}{R}$$

(4)
$$Mg\sqrt{1-\left(\frac{R-a}{R}\right)^2}$$



Sol. (4)

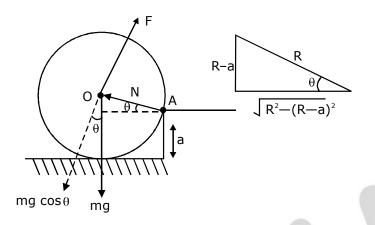

$$cos \theta = \frac{\sqrt{R^2 - \left(R - a\right)^2}}{R}$$

$$=\sqrt{\frac{R^2}{R^2} - \left(\frac{R-a}{R}\right)^2}$$

$$= \sqrt{1 - \left(\frac{R - a}{R}\right)^2}$$

to pull up, $\tau_{F} \geq \tau_{mq}$

 $FR \geq mg\cos\theta R$

for min F, $F_{min} = mg \cos \theta$

$$F_{min} = mg\sqrt{1 - \left(\frac{R - a}{R}\right)^2}$$

- **Q.15** In a reactor, 2 kg of $_{92}$ U²³⁵ fuel is fully used up in 30 days. The energy released per fission is 200 MeV. Given that the Avogadro number, N = 6.023×10^{26} per kilo mole and 1 eV = 1.6×10^{-19} J. The power output of the reactor is close to
 - (1) 60 MW
- (2) 54 MW
- (3) 125 MW
- (4) 35 MW



Sol. (1)

$$n(moles) = \frac{2kg}{235gm} = \frac{2000}{235}$$

no. of nucleus = $N_A \times n$

$$=6.022\times10^{23}\times\frac{2000}{235}$$

$$= 51.25 \times 10^{23}$$

total energy released = $200 \times 51.25 \times 10^{23}$ MeV

$$= 102.5 \times 10^{25} \text{ MeV}$$

=
$$102.5 \times 10^{25} \times 10^{6} \times 1.6 \times 10^{-16}$$
J

$$= 164 \times 10^{6} \text{ MJ}$$

$$power = \frac{164 \times 10^6 \,\text{MJ}}{30 \times 24 \times 60 \times 60 \,\text{S}}$$

$$= 0.063 \times 10^3 \text{ MW}$$

 \cong 60MW


Q.16 A charged particle (mass m and charge q) moves along X axis with velocity V_0 . When it passes through the origin it enters a region having uniform electric field $\vec{E} = -E\hat{j}$ which extends upto x = d. Equation of path of electron in the region x > d is :

$$\begin{array}{c|c}
 & \downarrow E \\
\hline
V_0 & \downarrow d
\end{array}$$

(1)
$$y = \frac{qEd^2}{mV_0^2}x$$

$$\text{(1)} \ y = \frac{qEd^2}{mV_0^2} \ x \qquad \qquad \text{(2)} \ \ y = \frac{qEd}{mV_0^2} \bigg(\frac{d}{2} - x \bigg) \quad \text{(3)} \ \ y = \frac{qEd}{mV_0^2} \bigg(x - d \bigg) \quad \text{(4)} \ \ y = \frac{qEd}{mV_0^2} \ x$$

Sol.



$$- y = \frac{1}{2} at^2$$



$$-y = \frac{1}{2} \frac{qE}{m} t^2$$
 ...(1)

$$X = V_0 t$$

$$\Rightarrow t = \frac{x}{V_0} \qquad ...(2)$$

for
$$x \le d$$
,

$$y = -\frac{1}{2} \frac{qE}{m} \frac{x^2}{V_0^2}$$
 ...(3)

$$\left. \frac{dy}{dx} \right|_{x=d} = -\frac{1}{2} \left. \frac{qE}{m} \times \frac{2x}{V_0^2} \right|_{x=d}$$

$$Slope = m = tan \theta = -\frac{qEd}{mV_0^2}$$

equation of straight line, $y = (tan\theta) x + c$

$$= - \Bigg(\frac{qEd}{mv_0^2} \Bigg) x + c$$

(now for C, at x = d, $y = -\frac{qEd^2}{2mv_0^2}$ put in (4)

...(4)

$$-\frac{qEd^2}{2mv_0^2} = -\frac{qEd^2}{mV_0^2} + c$$

$$\Rightarrow c = \frac{qEd^2}{2mv_0^2}$$

for x > d, as no \vec{E}


$$y = -\left(\frac{qEd}{mv_0^2}\right)x + \frac{qEd^2}{2mv_0^2}$$

$$y = \frac{qEd}{mv_0^2} \left(\frac{d}{2} - x \right)$$

- **Q.17** Train A and train B are running on parallel tracks in the opposite directions with speeds of 36 km/hour and 72 km/hour, respectively. A person is walking in train A in the direction opposite to its motion with a speed of 1.8 km/hour. Speed (in ms⁻¹) of this person as observed from train B will be close to: (take the distance between the tracks as negligible)
 - (1) 29.5 ms⁻¹
- (2) 30.5 ms⁻¹
- (3) 31.5 ms⁻¹
- (4) 28.5 ms⁻¹



Sol. (1)



$$\overrightarrow{V_m} = \overrightarrow{V_{m/A}} + \overrightarrow{V_A}$$

$$= (-1.8 \hat{i} + 36 \hat{i}) \text{km/h}$$

$$= \left(-1.8 \times \frac{5}{18} + 36 \times \frac{5}{18}\right) m \text{ / s}$$


$$= \left(-0.5\hat{i} + 10\hat{i}\right)$$
m/s

$$\overrightarrow{V_{m/B}} \, = \, \overrightarrow{V_M} \, - \, \overrightarrow{V_B}$$


$$=9.5\hat{i} - (-20\hat{i})m/s$$

$$= 29.5 \text{ m/s } \hat{i}$$

Q.18 Shown in the figure is rigid and uniform one meter long rod AB held in horizontal position by two strings tied to its ends and attached to the ceiling. The rod is of mass `m` and has another weight of mass 2 m hung at a distance of 75 cm from A. The tension in the string at A is:



Sol. (3)



At equilibrium torque about any axis must be zero. Taking the torque about B.

$$T \times 100$$
cm = mg × 50cm + 2mg × 25cm

$$T = 1 mg$$



- Q.19 The least count of the main scale of a vernier callipers is 1 mm. Its vernier scale is divided into 10 divisions and coincide with 9 divisions of the main scale. When jaws are touching each other, the 7th division of vernier scale coincides with a division of main scale and the zero of vernier scale is lying right side of the zero of main scale. When this vernier is used to measure length of a cylinder the zero of the vernier scale between 3.1 cm and 3.2 cm and 4th VSD coincides with a main scale division. The length of the cylinder is: (VSD is vernier scale division)
 - (1) 3.21 cm
- (2) 3.07 cm
- (3) 2.99 cm
- (4) 3.2 cm

Sol. (2)

$$L.C. = 1MSD - 1VSD$$

$$L.C. = 0.1MSD$$

+ve zero error =
$$+7 \times L.C.$$

$$= 0.7 mm$$

Reading =
$$(3.1cm + 4 \times L.C)$$
 – zero error

$$= 3.1cm + 0.4mm - 0.7mm$$

$$= 3.1 \text{cm} - 0.03 \text{cm} \text{ (as given 1 MSD} = 1 \text{mm)}$$

$$= 3.07 cm$$

Q. 20 A particle of mass m with an initial velocity $u\hat{i}$ collides perfectly elastically with a mass 3m at rest. It moves with a velocity $\nu\hat{j}$ after collision, then ν is given by:

(1)
$$V = \frac{1}{\sqrt{6}}u$$
 (2) $V = \sqrt{\frac{2}{3}}u$ (3) $V = \frac{u}{\sqrt{3}}$

(2)
$$V = \sqrt{\frac{2}{3}}I$$

(3)
$$V = \frac{u}{\sqrt{3}}$$

(4)
$$V = \frac{u}{\sqrt{2}}$$

Sol.

(before collision)

$$\overrightarrow{p_i} = \overrightarrow{p_f}$$

$$mu\hat{i} + 0 = mv\hat{j} + 3m\overrightarrow{V_2}$$

$$\frac{mu\,\hat{i}}{3m} - \frac{mv\hat{j}}{3m} = \overrightarrow{V_2}$$

$$\overrightarrow{V_2} = \frac{u}{3} \hat{i} - \frac{v}{3} \hat{j}$$

now, K-E is conserved in an elastic collision,

$$\Sigma KE_i = \Sigma KE_f$$




$$\frac{1}{2}mu^2 = \frac{1}{2}mv^2 + \frac{1}{2}3m\bigg(\frac{u^2}{9} + \frac{v^2}{9}\bigg)$$

$$\Rightarrow u^2 = v^2 + \frac{u^2}{3} + \frac{v^2}{3}$$

$$\frac{2}{3}u^2 \, = \frac{4}{3}\,v^2$$


$$\Rightarrow$$
 v = $\frac{u}{\sqrt{2}}$

Q.21



A small block starts slipping down from a point B on an inclined plane AB, which is making an angle θ with the horizontal section BC is smooth and the remaining section CA is rough with a coefficient of friction μ . It is found that the block comes to rest as it reaches the bottom (point A) of the inclined plane. If BC = 2AC, the coefficient of friction is given by μ =k tan θ . The value of k is ______.

Sol. (3)



from work energy theorem

$$W_a + W_f = \Delta kE$$

mg 3xsin
$$\theta$$
 – μ mg cos θ x = 0 – 0

$$\Rightarrow mg3x \sin\theta = \mu mg\cos\theta x$$

$$3 \tan \theta = \mu$$

$$k = 3$$

Q.22 An engine takes in 5 moles of air at 20°C and 1atm, and compresses it adiabatically to 1/10th of the original volume. Assuming air to be a diatomic ideal gas made up of rigid molecules, the change in its internal energy during this process comes out to be X kJ. The value of X to the nearest integer is ______.

Sol. (46)

$$T_2 V_2^{\gamma-1} \, = \, T_1 V_1^{\gamma-1}$$

$$T_2 = T_1 \left(\frac{V_1}{V_2} \right)^{\gamma - 1}$$



$$= 293 \left(\frac{V}{V/10}\right)^{\frac{7}{5}-1}$$

$$T_2 = 293 \times (10)^{2/5}$$

$$\Delta U = nC_v \Delta T = 5 \times \frac{5}{2} R \left(293 \times 10^{\frac{2}{5}} - 293\right)$$

$$= \frac{25}{2} R \times 293 \left(10^{\frac{2}{5}} - 1\right) = \frac{25R}{2} \times 293(2.5 - 1)$$

$$= \frac{25 \times 8.314 \times 293 \times 1.5}{2}$$

Q.23 When radiation of wavelength λ is used to illuminate a metallic surface, the stopping potential is V. When the same surface is illuminated with radiation of wavelength 3λ ,

the stopping potential is $\frac{V}{4}$. If the threshold wavelength for the metallic surface is $n\lambda$

then value of n will be .

$$\frac{hc}{\lambda} = \phi + eV \qquad ...(1)$$

$$\frac{hc}{3\lambda} = \phi + \frac{eV}{4} \qquad ...(2)$$

$$\frac{eq.(1)}{eq.(2)} \qquad \qquad 3 = \frac{\phi + eV}{\phi + \frac{eV}{4}}$$

$$3\phi + \frac{3eV}{4} = \phi + eV$$

= 45675 J = 46kJ

$$2\phi = \frac{eV}{4}$$

$$\phi = \frac{eV}{8}$$

$$\frac{hc}{\lambda} = \frac{eV}{8} + eV = \frac{9}{8}eV$$


$$\therefore eV = \frac{8}{9} \frac{hc}{\lambda}$$

so
$$\phi = \frac{hc}{\lambda} - \frac{8}{9} \frac{hc}{\lambda}$$

$$\phi = \frac{1}{9} \frac{hc}{\lambda}$$

$$\frac{hc}{\lambda_{th}} = \frac{hc}{9\lambda}$$

$$\therefore \lambda_{th} = 9\lambda$$



Sol. (15)

$$\phi = BA \cos \omega t$$

 $E = \frac{-d\phi}{dt} = BA\omega \sin \omega t$

$$E_{max} = BA \omega \qquad \left(\omega = \frac{\pi}{0.2}\right)$$

$$= 3 \times 10^{-5} \times \pi R^2 \times \frac{\pi}{0.2}$$

$$= 15 \times 10^{-6} V$$

$$= 15 \mu V$$

- **Q.25** A $5\mu F$ capacitor is charged fully by a 220V supply. It is then disconnected from the supply and is connected in series to another uncharged 2.5 μF capacitor. If the energy change during the charge redistribution is $\frac{X}{100}J$ then value of X to the nearest integer is
- Sol. (4) Our Answer NTA Answer 36 heat = $U_i - U_f$ $= \frac{1}{2} \frac{C_1 C_2}{C_1 + C_2} (V_1 - V_2)^2$ $= \frac{1}{2} \frac{5 \times 2.5}{7.5} (220 - 0)^2$

$$= \frac{5}{6} \times 220 \times 220 \times 10^{-6} \, J$$

$$=40,333.33 \times 10^{-6} J$$

$$= 40.3 \times 10^{-3} = \frac{X}{100}$$

$$\Rightarrow$$
 x = 4.03

$$\approx 4$$